

TURBO blue line

FEATURES

- # CB & 10m Mobile antennas
- # Tunable from 27 to 28.5 MHz
- # TURBO 800 S: 17/7 PH stainless steel spring whip
- # TURBO 1000, 2000, 3000: 17/7 PH tapered stainless steel whip
- # Metallic blue plastic coil cover and base, brass parts pearl finish chrome
- # 90° adjustable whip no tools required detachable for car-wash
- # DC-Ground protection
- # PL version (suffix PL) with a special base connection suitable for magnetic mount installation (no cable supplied)



REMARK: Each model has a specific BASE and COIL to match together for the best performance. BASES and COILS can't be mixed.

TECHNICAL DATA

Type:	base loaded
Impedance:	50 Ω
Frequency range:	27 ... 28.5 MHz
Polarization:	linear vertical
SWR @ res. freq.:	≤ 1.2
Max. power:	200Watts (CW) continuous, 1000Watts (CW) short time
Bandwidth @ SWR ≤ 2:	
TURBO 800 S	≥ 430 kHz (40 channel)
TURBO 1000	≥ 660 kHz (60 channel)
TURBO 2000	≥ 1100 kHz (100 channel)
TURBO 3000	≥ 1600 kHz (140 channel)
Mounting:	
TURBO series	hole Ø 12.5 mm, 1/2 in
TURBO PL series	UHF-male (PL 259)
Cable lenght / Type:	
TURBO series	4 m, 13ft / RG 58
TURBO PL series	not supplied
Height (approx.):	
TURBO 800 S / 800 S PL	840 mm, 2 3/4 ft
TURBO 1000 / 1000 PL	1150 mm, 3 3/4 ft
TURBO 2000 / 2000 PL	1450 mm, 4 3/4 ft
TURBO 3000 / 3000 PL	1710 mm, 5.6 ft
Weight (approx.):	580 gr, 1.3 lb

P/N 2201905.40	TURBO 800 S
P/N 2202005.40	TURBO 1000
P/N 2202105.40	TURBO 2000
P/N 2202405.40	TURBO 3000

P/N 2201905.41	TURBO 800 S PL
P/N 2202005.41	TURBO 1000 PL
P/N 2202105.41	TURBO 2000 PL
P/N 2202405.41	TURBO 3000 PL

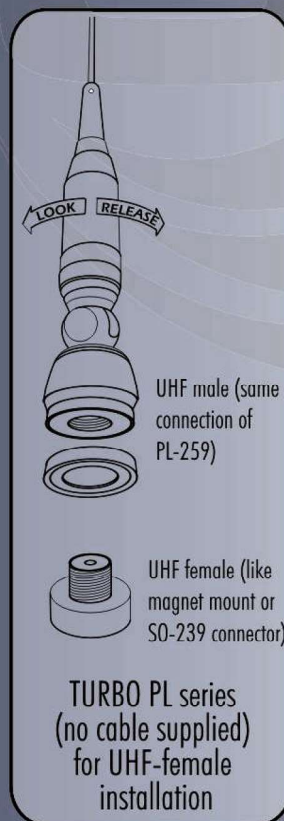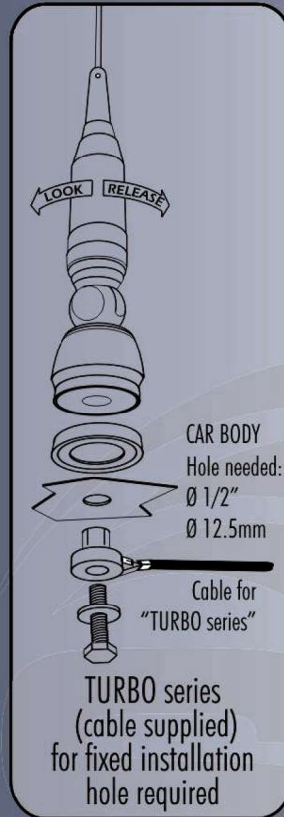

90° ADJUSTABLE
no tools required

17/7 PH
TAPERED
STAINLESS
STEEL

17/7 PH
STAINLESS
STEEL SPRING
WITH NYLON
REINFORCE



TURBO 800 S

TURBO 1000
TURBO 2000
TURBO 3000